
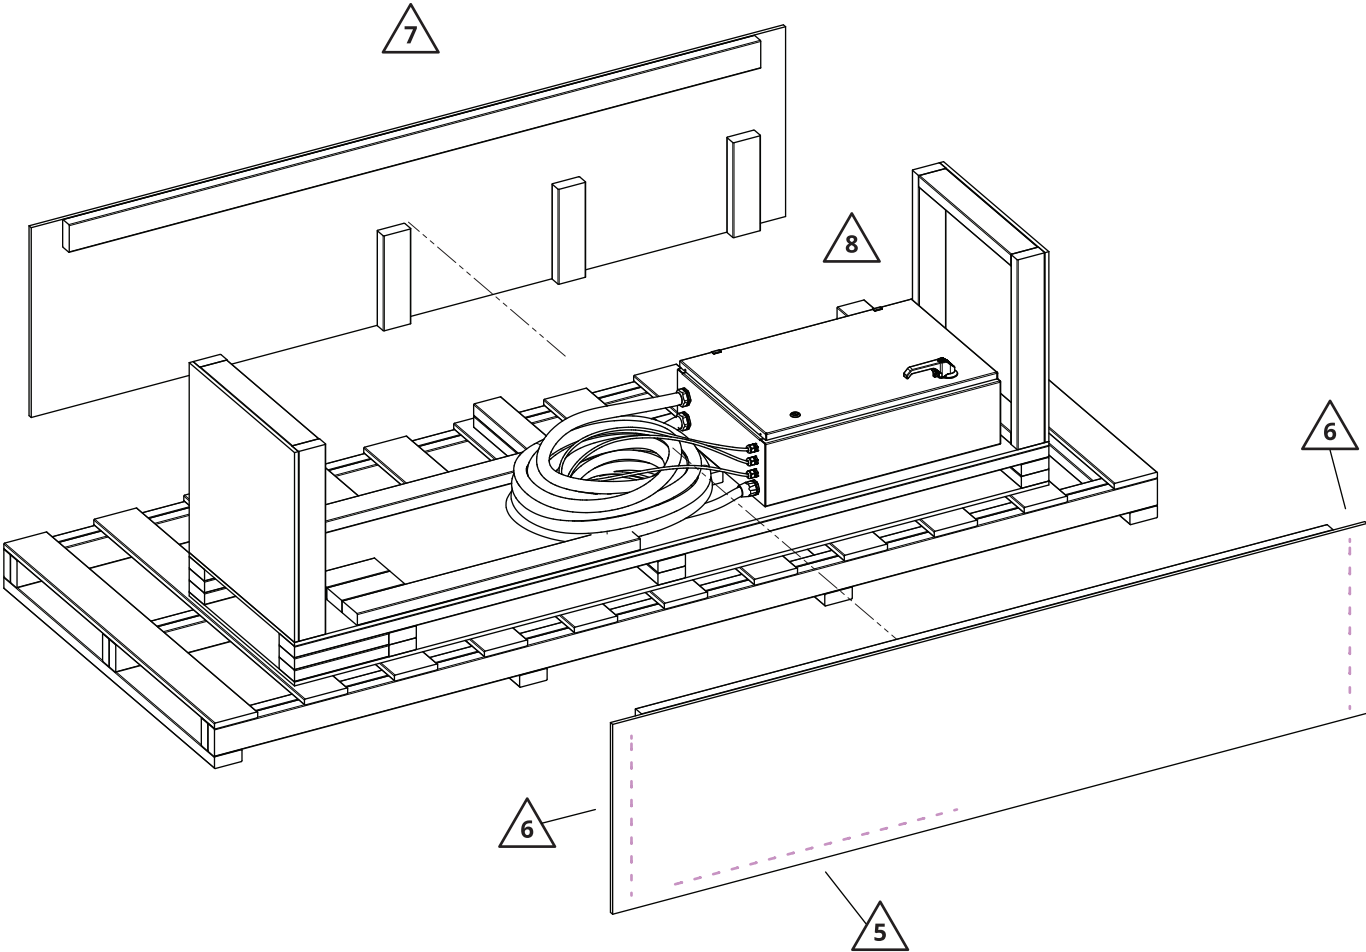


REV	REVISION DESCRIPTION	DATE	APPROVED
-	----	-----	----

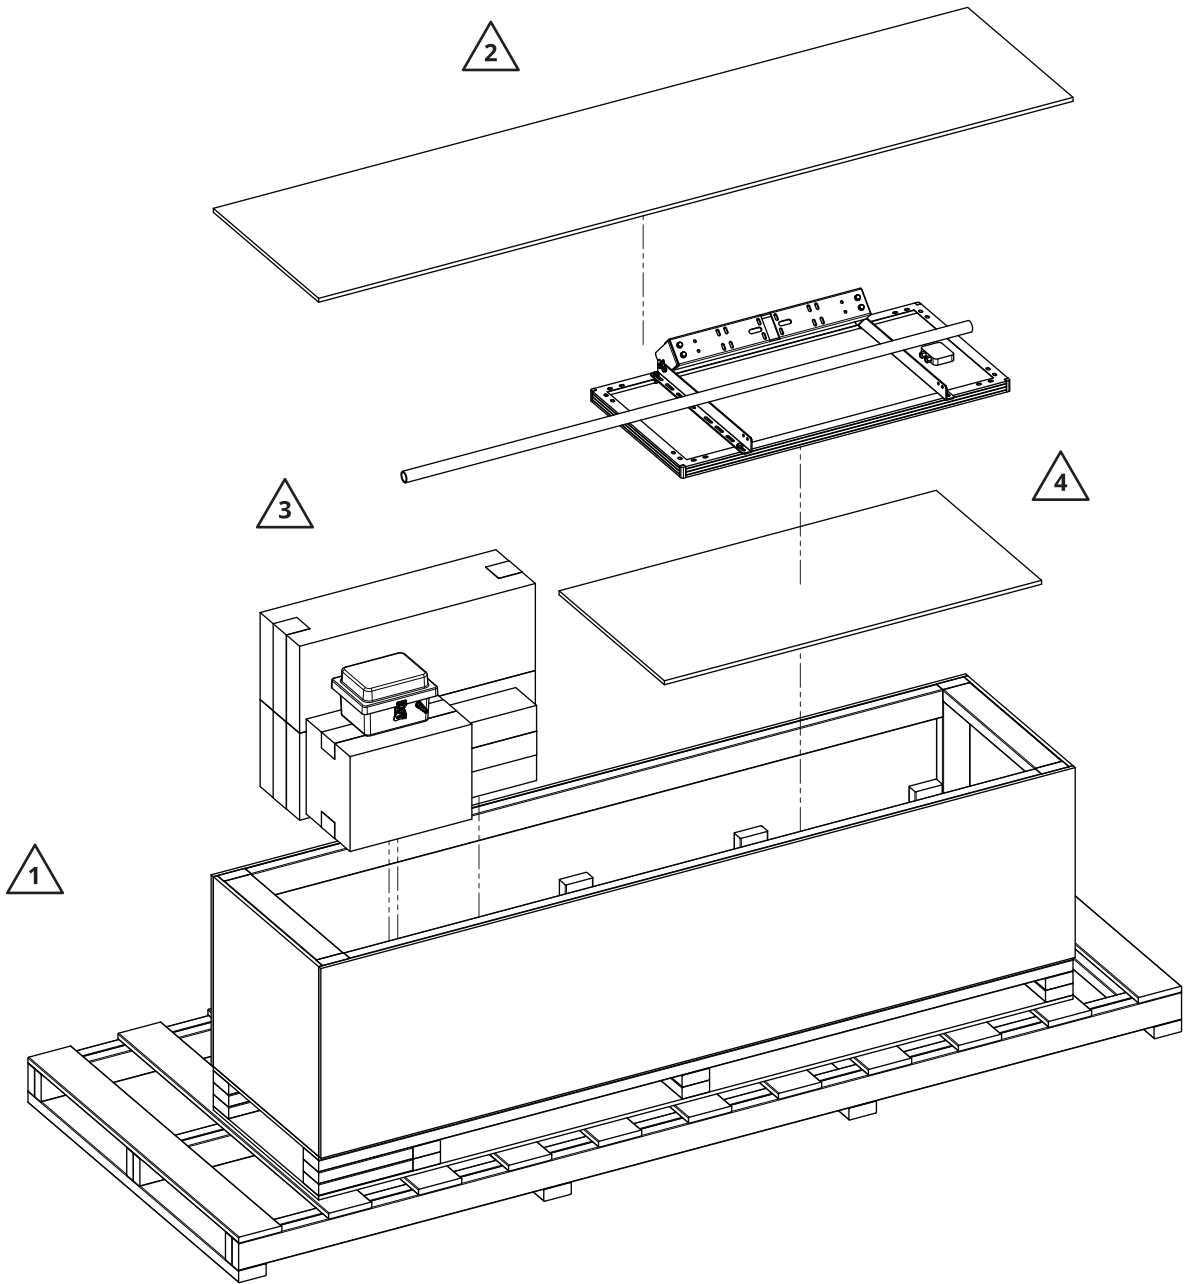

CINQ EDGE (SOLAR) DISASSEMBLY PROCEDURE :

1. UNPACK CINQ EDGE MAST ASSEMBLIES AND GROUNDING RODS FROM CRATE BASE ARMS
2. REMOVE CRATE LID
3. UNPACK LOOSE CINQ EDGE PARTS (ANTENNAS, RADAR, BATTERY, FIELD HARDWARE KIT, CONDUIT, AND SOLAR PANEL ASSEMBLY)
4. REMOVE TABLE TOP
5. UNSCREW SIDE PANELS FROM FOOTER
6. UNSCREW SIDE PANELS FROM CRATE ENDS
7. REMOVE CRATE SIDES FROM CRATE BASE & CRATE ENDS
8. UNPACK CINQ EDGE ENCLOSURE ASSEMBLY AND REMAINING PARTS

	DRAWN	NAME	DATE	TITLE 402323 CINQ EDGE SOLAR ON-SITE DISASSEMBLY	
	APPROVED	JTW	4/27/26		
2405 NICHOLSON AVE, KANSAS CITY, MO 64120		DIVISION ELECTRONICS		PART NUMBER ----	
		SERIES ASSEMBLY		DESCRIPTION 402323 ASSY, CINQ EDGE, SOLAR FIELD DISASSEMBLY PROCEDURE	
USE OF THIS DOCUMENT AND INFORMATION IS ONLY GRANTED UNDER CONSIDERATION OF OR USE UNDER CONTRACTUAL AGREEMENT. THIS DOCUMENT IS PROPERTY OF COMET INDUSTRIES AND MUST BE RETURNED / DESTROYED ON REQUEST.		PROJECT CINQ EDGE		DWG NO. 481403	VERSION -
				SCALE 1 : 16	SHEET 1 OF 1